


| Manufacturer                       | IPKARTING S.R.L.                       |
|------------------------------------|----------------------------------------|
| Chassis model                      | SIRIUS (PRAGA - GRAND 2011)            |
| Category                           | ROTAX MAX Challenge, 125 MAX DD2 class |
| Validity of approval               | without limitation                     |
| Date of approval by BRP-Powertrain | 2012 08 27                             |


## Technical definiton of the frame Built according to CIK regualtions for short circuits karts


| Technical definition of the components of the chassis |                                                                     |  |
|-------------------------------------------------------|---------------------------------------------------------------------|--|
| Brake system:                                         | Designed according to CIK rules for shifter classes.                |  |
|                                                       | A brake system with a valid CIK Homologation must be used.          |  |
| Bodywork:                                             | Designed according to CIK rules for short circuit karts.            |  |
|                                                       | A bodywork with a valid CIK Homologation must be used.              |  |
| Rear Tire Protection System:                          | For the participation at national or internatioinal ROTAX MAX       |  |
|                                                       | Challenge race, the ROTAX Rear Tire Protection System must be used. |  |

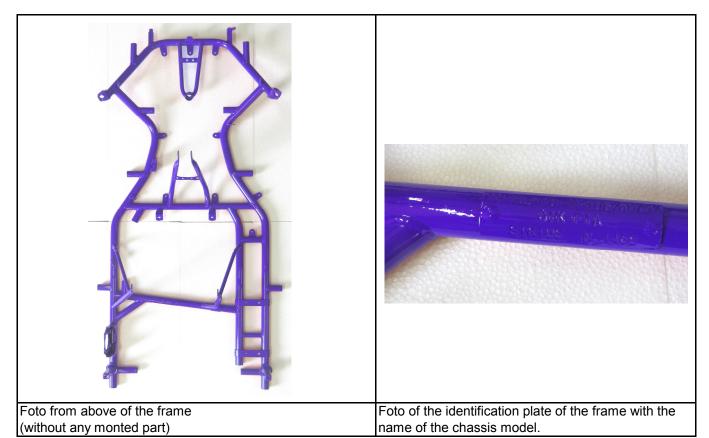

| Technical description                                         | Dimensions   | Tolerance  |
|---------------------------------------------------------------|--------------|------------|
| Outer diameter of the main tubes (without painting)           | Ø30 / Ø32 mm | +/- 0,5 mm |
| Rear width of main tubes (center line to center line)         | 610 mm       | +/- 5,0 mm |
| Distance of the rear two main tubes on the right side (center | 104 mm       | +/- 0,5 mm |
| line to center line)                                          |              |            |
| Wheelbase                                                     | 1050 mm      | +/- 5,0 mm |

| Technical description                                    | Figure |
|----------------------------------------------------------|--------|
| Number of adjustable/removeable stabilizers at the frame | 3      |

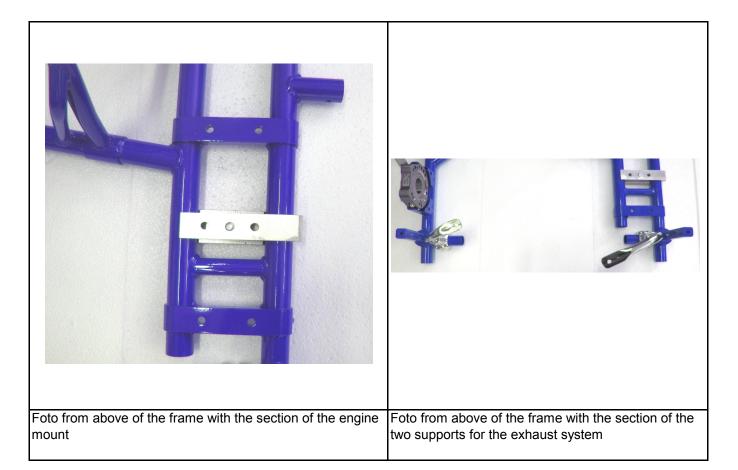

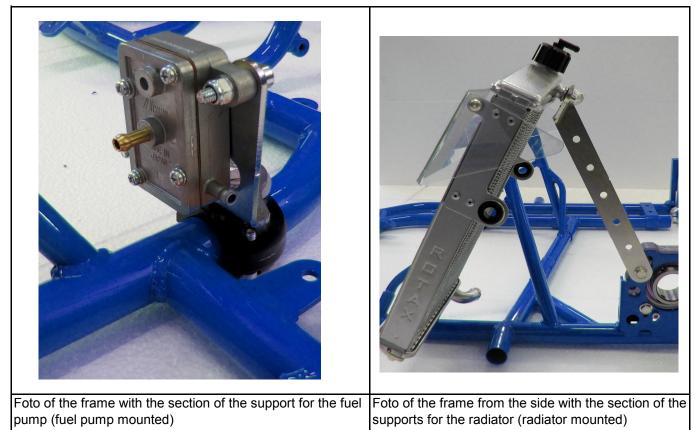

| Foto from the steering column with the section with the knurling for the steering wheel hub (knurling according to DIN 82 - RAA1). | Foto from above of the frame with the section of the<br>two supports for the RTPS<br>(Rear Tire Protection System) |
|------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------|
|                                                                                                                                    |                                                                                                                    |
| Foto of the frame from the side with the section of the support for the RTPS (Rear Tire Protection System)                         | Foto of the frame from the back with the section of<br>the support for the RTPS<br>(Rear Tire Protection System)   |