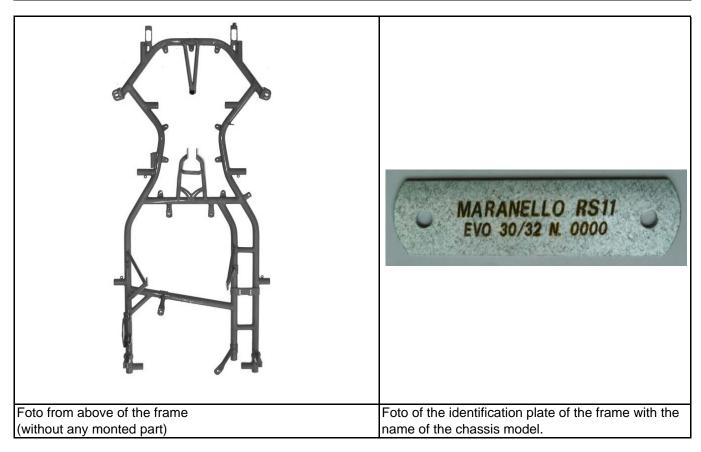
## **BRP-ROTAX CHASSIS APPROVAL FORM**



Manufacturer	CRG
Chassis model	MARANELLO RS11 EVO 30/32
Category	ROTAX MAX Challenge, 125 MAX DD2 class
Validity of approval	without limitation
Date of approval by BRP-POWERTRAIN GmbH CO KG	2011 10 03
,	

Technical definiton of the frame	
Built according to CIK regualtions for short circuits karts	

Technical definition of the components of the chassis			
Brake system:	Designed according to CIK rules for shifter classes.		
	A brake system with a valid CIK Homologation must be used.		
Bodywork:	Designed according to CIK rules for short circuit karts.		
	A bodywork with a valid CIK Homologation must be used.		
Rear Tire Protection System:	: For the participation at national or internatioinal ROTAX MAX		
	Challenge race, the ROTAX Rear Tire Protection System must be used.		



Technical description	Dimensions	Tolerance
Outer diameter of the main tubes (without painting)	mm 30 - 32	+/- 0,5 mm
Rear width of main tubes (center line to center line)	mm 618	+/- 5,0 mm
Distance of the rear two main tubes on the right side (center	mm 104	+/- 0,5 mm
line to center line)		
Wheelbase	mm 1046	+/- 5,0 mm

Technical description	Figure
Number of adjustable/removeable stabilizers at the frame	2

## **BRP-ROTAX CHASSIS APPROVAL FORM**

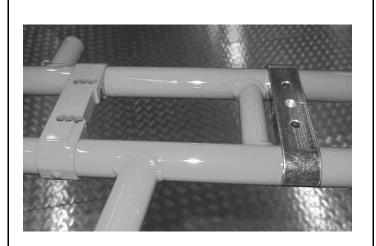




Foto from above of the frame with the section of the engine mount

Foto from above of the frame with the section of the two supports for the exhaust system

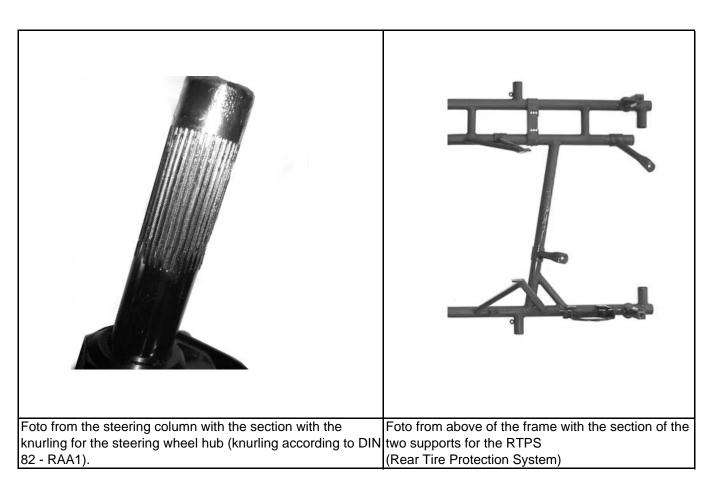


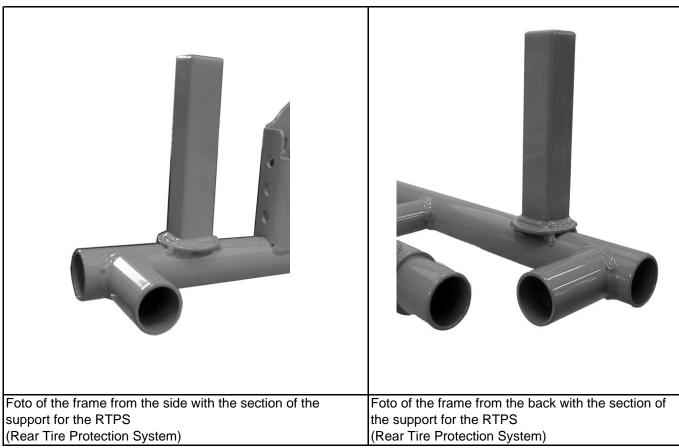


Foto of the frame with the section of the support for the fuel pump (fuel pump mounted)

Foto of the frame from the side with the section of the supports for the radiator (radiator mounted)

## **BRP-ROTAX CHASSIS APPROVAL FORM**





## RP-ROTAX CHASSIS APPROVAL FORM